


ISO 9001

RR SOLAR BATTERIES RANGE



**FIRST
NATIONAL
BATTERY**

THROUGH CARING WE LEAD

PHYSICAL CHARACTERISTICS

TYPE	CAPACITY (Ah)				DIMENSIONS (mm)			Wet Weight (kg)
	C ₁₀	C ₂₀	C ₇₂	C ₁₀₀	Length	Width	Height	
RR0	36	40	42	44	241	173	200	13.5
RR1	45	50	53	55	241	173	200	14.4
RR2	86	96	101	106	352	175	226	25.9

FEATURES AND BENEFITS

HANDLE

Easily Portable

DOUBLE SEPARATION

Envelope and Matt Separators prevent shedding of active material thus allowing deep cycling - prevents short circuits

STATE OF CHARGE INDICATOR

Fast visual indication of battery condition

HYBRID ALLOYS

Reduced maintenance and low water consumption, extended shelf life

QUALITY

Manufactured in terms of ISO 9001 Quality Management System

STATE OF CHARGE INDICATOR



FULLY CHARGED



GOOD CONDITION




CHARGING NECESSARY




ADD DISTILLED WATER

BOLT-ON TERMINALS (POS & NEG) OPTIONAL EXTRA

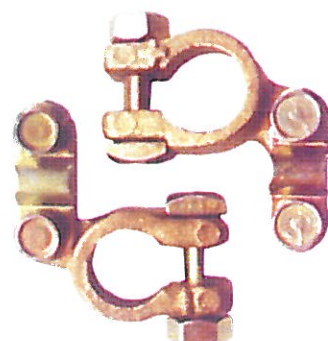

CYCLES vs DEPTH OF DISCHARGE OF RR2 BATTERY

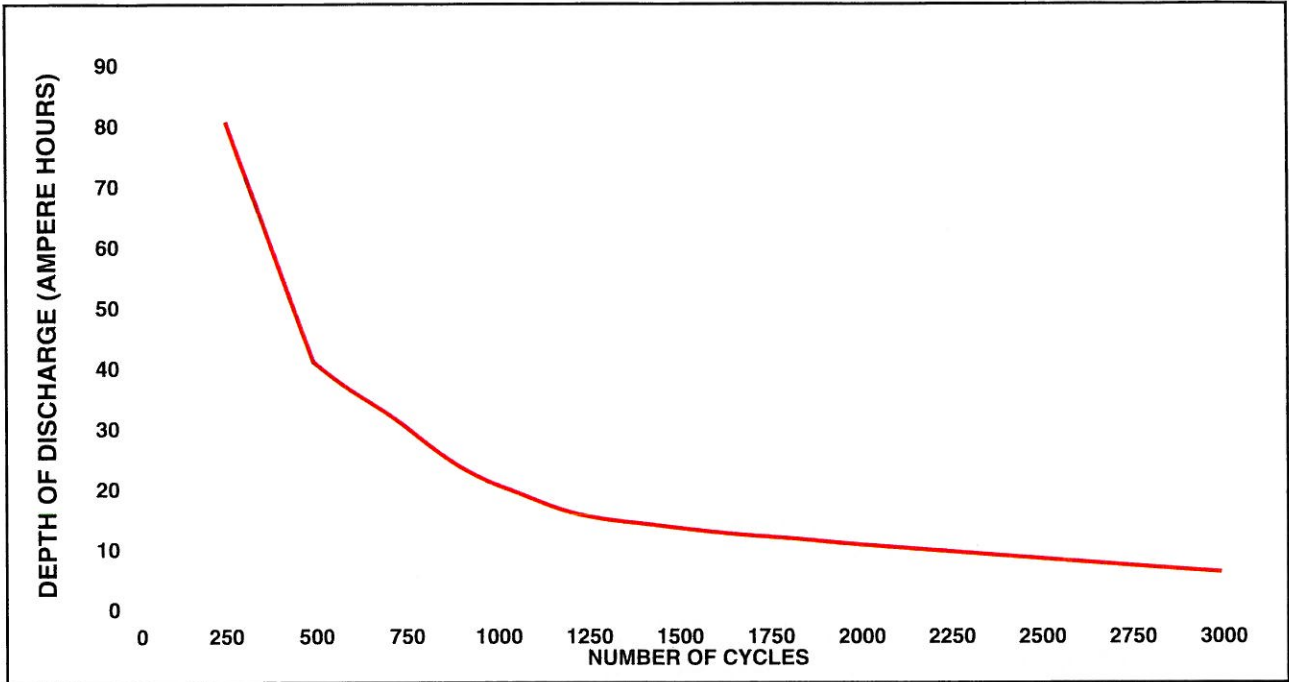

CAPACITY vs DURATION OF RR2 BATTERY

